


KW Weighing Platform Scales



Dimensions(mm):

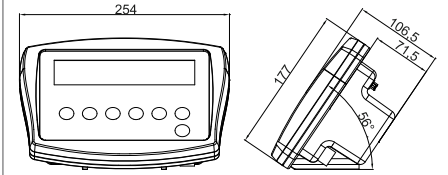

Features

Platform: stainless steel weighing pan, painted steel or aluminum die cast base, silicone-coated aluminum load cell.

When with pole, display angle can be adjusted

Capacity from 30kg to 600kg, external resolution up to 1/15,000

Full function: unit change, accumulation, checkweighing, simply counting

Check weighing: a visual and sound signal helps with portioning, dispensing or grading

Technical Data

Display: LCD display, digit height 24 mm, with white color LED backlight

Power: AC adapter (100~240VAC/12V500mA), lead acid battery (6V/4Ah), operation time: 70 hours

Operation temperature: -10°C~40°C

Accessories

- RS-232 interface, can connect to PC or printer
- RS-232 cable for PC
- RS-232 cable for printer
- Mini printer
- Label printer
- 3 color light tower

Standard



Factory Option



Model	Weighing Capacity [Max]kg	Readability [d]g	Verification value [e]g	Platform material	Pan size	Pole height
SKW-30k	30	2	-	Aluminum die cast	350 x 450 mm	600 mm
SKW-60k	60	5	-	Aluminum die cast	350 x 450 mm	600 mm
SKW-150k	150	10	-	Aluminum die cast	350 x 450 mm	600 mm
MKW-60k	60	5	-	Aluminum die cast	420 x 520 mm	660 mm
MKW-150k	150	10	-	Aluminum die cast	420 x 520 mm	660 mm
MKW-300k	300	20	-	Aluminum die cast	420 x 520 mm	660 mm
LKW-300k	300	20	-	Mild steel	600 x 800 mm	600 mm
LKW-600k	600	50	-	Mild steel	600 x 800 mm	600 mm
SKW-30k-M	30	10	10	Aluminum die cast	350 x 450 mm	600 mm
SKW-60k-M	60	20	20	Aluminum die cast	350 x 450 mm	660 mm
SKW-150k-M	150	50	50	Aluminum die cast	350 x 450 mm	660 mm
MKW-60k-M	60	20	20	Aluminum die cast	420 x 520 mm	660 mm
MKW-150k-M	150	50	50	Aluminum die cast	420 x 520 mm	660 mm
MKW-300k-M	300	100	100	Aluminum die cast	420 x 520 mm	660 mm
LKW-300k-M	300	100	100	Mild steel	600 x 800 mm	660 mm
LKW-600k-M	600	200	200	Mild steel	600 x 800 mm	660 mm